

# Epson Printheads Series UV Roll to Roll Printer


3.2米UV卷材打印机 — 高性价比之选

Dual Heads 双喷头

4/5/7-Color 4/5/7色写真

Variable Dot 可变墨滴

White & Neon Color Optional  
白色&荧光色可选

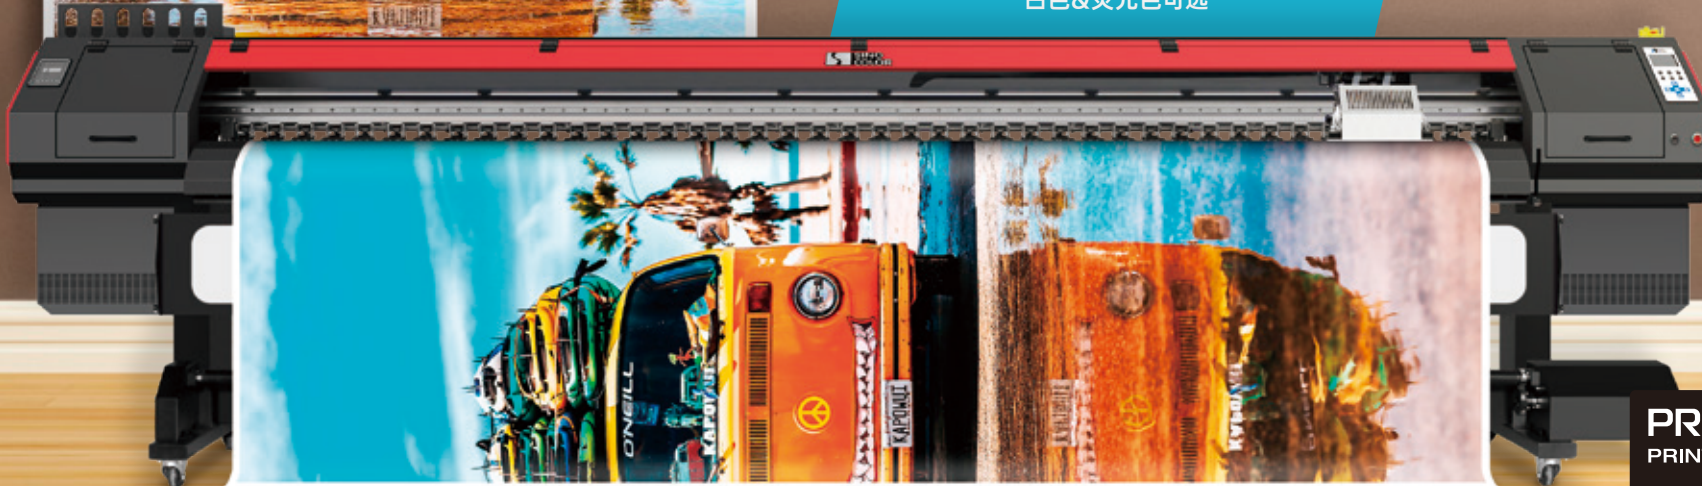

**PRECISIONCORE**  
PRINTHEAD  
powered by **EPSON**

## • Features




### Epson Official Supplied Printheads

Latest Epson Industrial Printhead i3200-U & i1600-U Equipped. Focus on super fast speed printing.




### Water Cooling UV-LED Lamp

It is one of the world's top UV-LED, long lifespan, low heat, and instant on-off



### Variable Dot Print Technology

Permitting the printer to provide smooth gradations, exceptional solid colors and optimum image quality in all print modes



### Anti-Collision Function

Anti-collision system is equipped to protect the printhead and carriage all the time



### Advanced Media Handling

With SinoColor advanced movement control system, each pass is uniform allowing for more sellable output in less time

- ★ High-density UV curable ink produces rich, vibrant colors on coated or uncoated media.
- ★ Durable, scratch-resistant and virtually odorless, Up to three years outdoor durability without lamination.
- ★ Branded parts are used for high attrition area. Greatly increased the lifetime and stability of the machine. For example, Hiwin guide rail, German Igus drag chain, Italian Megadyne belt.



## • Specification

| Model No.     |               | UV-1260S                                                           | UV-1260D            | UV-740D             |
|---------------|---------------|--------------------------------------------------------------------|---------------------|---------------------|
| Printing Head |               | 2/3 × Epson i3200-U                                                | 2/3 × Epson i1600-U | 2/3 × Epson i1600-U |
| Resolution    |               | 2400 dpi MAX                                                       |                     |                     |
| Media         | Width         | 3200 mm MAX                                                        |                     | 1800 mm MAX         |
|               | Type          | Canvas, Leather, PET Film, Reflective Film, Soft Ceiling Film Etc. |                     |                     |
| Ink           | Type          | UV Ink                                                             |                     |                     |
|               | Color         | CMYK / CMYK+W / CMYK+W+CMYK / CMYK+Neon M&Y+W                      |                     |                     |
|               | Curing        | High Quality Water Cooling UV-LED Lamp                             |                     |                     |
| Speed         | Printing Mode | CMYK                                                               |                     |                     |
|               | Draft         | 23 m²/h                                                            | 21 m²/h             | 16 m²/h             |
|               | Production    | 18 m²/h                                                            | 16 m²/h             | 12 m²/h             |
|               | Quality       | 12 m²/h                                                            | 10 m²/h             | 8 m²/h              |
| Cleaning      |               | Automatic Cleaning, Anti-Clogging Flash Function & Capping System  |                     |                     |
| Feed & TakeUp |               | Automatic Media Feeding (Standard) & Take up System (Optional)     |                     |                     |
| Rip Software  |               | Maintop (Standard) / FlexiPRINT (Optional)                         |                     |                     |
| Connector     |               | USB 3.0                                                            |                     |                     |
| Power         |               | AC 110/ 220V, 50/ 60Hz, 1900W                                      |                     |                     |
| Size          | Machine       | L4530×W710×H1395 mm                                                |                     | L3130×W710×H1380 mm |
|               | Packing       | L4610×W1000×H740 mm                                                |                     | L3210×W1000×H740 mm |
| Weight        | Machine       | 500 KG                                                             |                     | 280 KG              |
|               | Packing       | 640 KG                                                             |                     | 400 KG              |

Specifications are subject to change without notice.