

Direct Textile Printer

for Flag Polyester / Cotton Material

旗帜布/纯棉直喷一体机

Professional
专业

Dual Heads
双喷头

Super Reliable
超稳定



Easy to Use
易于使用

2 Sizes & 3 Print-heads Configurations Available 提供两种尺寸和三种喷头配置



Direct Textile Printer


FP-740 & FP-1260

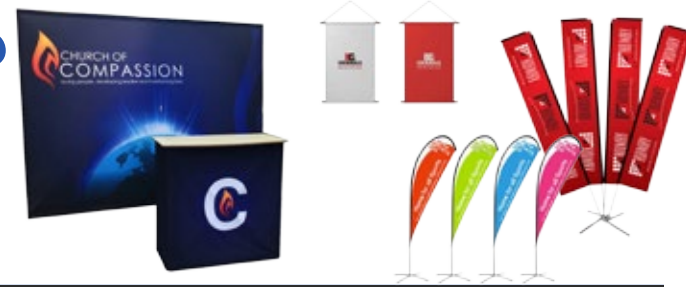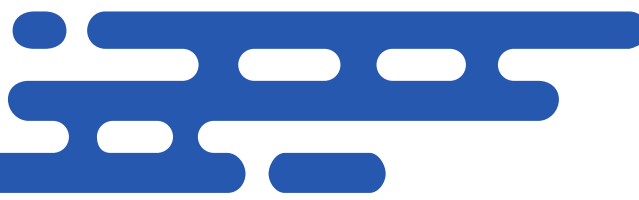

• Features 特点



Equipped Epson DX8 / 5113 Head
Latest Epson core printhead boost the print speed into the sky. Flagship model DX8 reduce maintenance cost dramatically.
装备爱普森5113或DX8喷头
采用爱普森PrecisionCore技术，打印速度快



Integrated Sealed Heating Oven
20%+ energy saving,
Integrated ventilator saves space

一体式节能密封烘箱
节能20%以上，不额外占用空间



Heating Cutter (Optional)
A unique small device that saves time for finishing process.

加热切刀(选配)
即印即切，方便快捷



Unsurpassed Print Speed
This model has 50% increased in speed, that means a lot of savings for a print company that requires multiple flag printers
无与伦比的打印速度
速度提高了50%，可节省大量成本



Advanced Media Handling
New feed adjuster system for even tensioning to prevent skewing

强大的送布系统
新送布调整系统有效避免了走布偏差

• Specification 参数

Model No.	产品型号	FP-740	FP-740C	FP-1260	FP-1260C
Printhead 喷头	Type 喷头类型	Dual Epson 5113 (DX5 optional)	Dual Epson DX8	Dual Epson 5113 (DX5 optional)	Dual Epson DX8
	Nozzles 喷嘴数量	1440 Nozzles per Head			
	Height 高度调节	2-8mm Above Media Adjustable			
Max Printing Width 打印尺寸		1.8 meter (74 Inch)		3.2 meter (126 Inch)	
Resolution (dpi) 打印精度		1440 dpi			
Media Types 适应耗材		Sublimation Ink: Polyester, Chemical Fiber, Urethane Elastic Fibre, 35% Cotton, Heat Transfer Paper 涤纶, 化纤, 氨纶弹性纤维, 35%棉, 热转印纸 Textile Pigment Ink: 100% Cotton Material (not stretchable) 纯棉(无弹性)			
Ink 墨水	Type 墨水类型	Sublimation Ink, Textile Pigment Ink 热转印油墨, 纺织颜料墨水			
	Color 墨水颜色	4 Color / 8 Color			
	Droplet 墨滴大小	1.5 - 21pl Variable			
	Cartridge 墨水容量	8 x 350ml Continuous Ink Supply			
Speed 速度	Draft 草图模式	36 sqm/h	54 sqm/h	42 sqm/h	60 sqm/h
	Standard 标准模式	28 sqm/h	40 sqm/h	32 sqm/h	42 sqm/h
	Quality 精细模式	21 sqm/h	26 sqm/h	24 sqm/h	30 sqm/h
	Photo 照片模式	15 sqm/h	18 sqm/h	18 sqm/h	24 sqm/h
Feed & take up 收放布系统		Automatic Media Feeding & Take up System			
Cleaning 清洗系统		Automatic Cleaning, Anti-Clogging Flash Function & Capping System 自动清洗, 闪喷, 封喷头			
Heating System 加热系统		Pre/Post Heater Equipped			
Cooling System 冷却系统		Cooling Fan Equipped			
Environment 工作环境		Temperature: 20-28 C., Humidity: 40%-60%			
Rip Software 图像处理		Maintop/ Photoprint			
Control Software 控制软件		SinoColor Print Console			
Interface 输入接口		USB3.0			
Operation System 操作系统		Windows 7/XP			
Power 电源消耗		Machine 50/60HZ, 110 / 220V, 2000W			
Size 尺寸	Machine 机器尺寸	L2960 x W800 x H1270 mm / 300KG		L4360 x W800 x H1270 mm / 530KG	
	Packing 包装尺寸	L3060 x W900 x H700 mm / 420KG		L4460 x W900 x H700 mm / 680KG	

Specifications are subject to change without notice. 以上参数可能随机器版本改变，请以厂家最新数据为准。